

Sunmodule® Plus SW 240 – 255 poly



Produced in Germany,
the center for solar technology



TUV Power controlled:
Lowest measuring tolerance in industry



Sunmodule Plus:
Positive performance tolerance



25 year linear performance warranty and
10 year product warranty



SolarWorld AG relies on Germany as its technology location, thereby ensuring sustainable product quality.

The TUV Rheinland Power controlled inspection mark guarantees that the nominal power indicated for solar modules is inspected at regular intervals and thus ensured. The deviation to TUV is maximum 2 percent.

The positive power tolerance guarantees utmost system efficiency. Only modules achieving or exceeding the designated nominal power in performance tests are dispatched. The power tolerance ranges between -0 Wp and +5 Wp.

With its linear performance warranty covering a period of 25 years, SolarWorld guarantees a maximum performance degradation of 0.7% p.a., a significant added value compared to the two-phase warranties common in the industry. Therefore, the service certificate offers comprehensive protection for your investment in the long term.



We turn sunlight into power.



CALL 1800 779 668

Sydney (Head Office): 4 Beaumont Road Mt Kuring-Gai NSW 2080
Melbourne: 896 Burwood Highway, Ferntree Gully VIC 3156

Tel: (02) 9457 2277 Fax: (02) 9457 2255

Tel: (03) 9753 5344 Fax: (03) 9753 5700

Email: sales@solaraustralia.com.au Web Site: www.solaraustralia.com.au

Sunmodule® Plus SW 240 – 255 poly

PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)*

		SW 240	SW 245	SW 250	SW 255
Maximum power	P_{max}	240 Wp	245 Wp	250 Wp	255 Wp
Open circuit voltage	U_{oc}	36.9 V	37.3 V	37.6 V	38.0 V
Maximum power point voltage	U_{mpp}	29.7 V	30.1 V	30.5 V	30.9 V
Short circuit current	I_{sc}	8.69 A	8.75 A	8.81 A	8.88 A
Maximum power point current	I_{mpp}	8.17 A	8.22 A	8.27 A	8.32 A


Measuring tolerance (P_{max}) traceable to TUV Rheinland: +/- 2% (TUV Power controlled)

*STC: 1000W/m², 25°C, AM 1.5

PERFORMANCE AT 800 W/m², NOCT, AM 1.5

		SW 240	SW 245	SW 250	SW 255
Maximum power	P_{max}	179.0 Wp	182.3 Wp	185.4 Wp	188.7 Wp
Open circuit voltage	U_{oc}	33.7 V	34.0 V	34.2 V	34.5 V
Maximum power point voltage	U_{mpp}	27.1 V	27.4 V	27.8 V	28.1 V
Short circuit current	I_{sc}	7.14 A	7.19 A	7.24 A	7.30 A
Maximum power point current	I_{mpp}	6.60 A	6.64 A	6.68 A	6.72 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m², 100% (+/-2%) of the STC efficiency (1000 W/m²) is achieved.

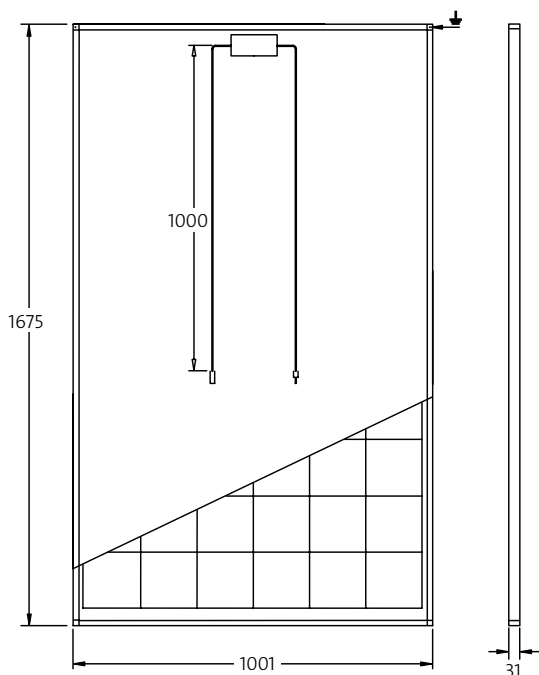

DIMENSIONS

Length	1675 mm
Width	1001 mm
Height	31 mm
Frame	Clear anodized aluminum
Weight	21.2 kg

COMPONENT MATERIALS

Cells per module	60
Cell type	Poly crystalline
Cell dimensions	156 mm x 156 mm
Front	4 mm tempered glass (EN 12150)

THERMAL CHARACTERISTICS


NOCT	46 °C
TC I_{sc}	0.081 %/K
TC U_{oc}	-0.37 %/K
TC P_{mpp}	-0.45 %/K

ADDITIONAL DATA

Power sorting	-0 Wp / +5 Wp
J-Box	IP65
Connector	MC4 / KSK4

PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

Maximum system voltage SC II	1000 V
Maximum reverse current	16 A
Load / dynamic load	5.4 / 2.4 kN/m ²
Number of bypass diodes	3
Operating range	-40 °C to +85 °C

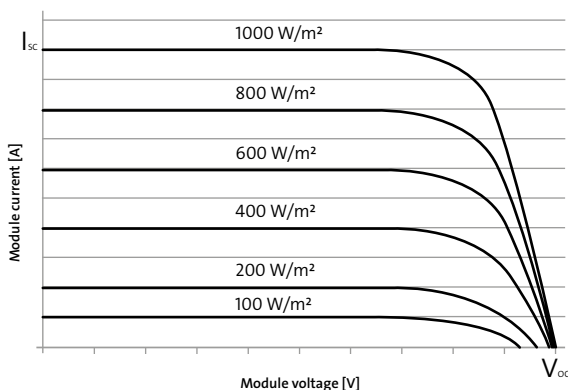

- Ammonia resistance tested
- Periodic Inspection
- Power Controlled



- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection
- Blowing sand resistant

